

Elite Heat MK3


Sales Specification Sheet

Description:

Robust blow moulded construction for durability in the hire sector. Nesting design for space saving whilst off hire. Using the SK15 lamp lamps with a 250mm pre-wired ends. Internal bi axis safety switch for increased protection. Lightweight and manoeuvrable design for ease of use.



Cable management system

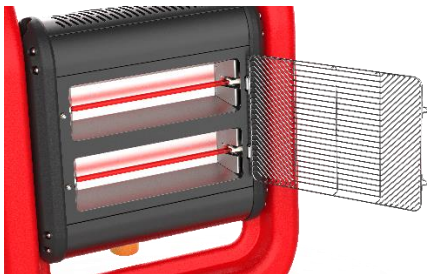

Hinged access to change lamps



Quick access panel on rear for maintenance



Rough Service



1.2 – 2.4KW



-10°to +40°C



Nesting



Safety tip switch

Specification:

- Maximum 2400W heat output, half power 1200W.
- 2X SK15 lamps
- Fully CE compliant.

Differentiator:

- Compact and robust design durable moulded construction
- Can be customer branded if MOQ is achieved
- Units nest together for significant space saving during transportation and storage.
- Instant heat, achieves full power within seconds.
- Highly polished reflector ensuring maximum heat output



Nesting, space saving design